

Hand Pallet Truck – HPT



Comfort handle

Handrails ergonomic tilt modeling. With lifting, handling, down three functions, Operational safety, Simple and flexible.



Pump overall seal

Pump sealed – hardware keyparts imported from Germany, eradicate spill drawbacks.



Thick curved fork

The front fork arc. Easy loading and unloading.



One-piece casting crafts

Pump and cylinder both are plungers. Fulcrum is a closed structure, high degree steel with imported seal and valve.

Designed to your needs

Advantage of Hand Pallet Truck

Time and Cost-Saving

Cheaper initial cost and less maintenance compared to forklifts. Less servicing means less downtime, and the fact that they do not need fuel to run means they are cheaper to operate.

Increased Efficiency

With the ability to transport various weights, this increases productivity levels and efficient operations. By using HPT Employees save energy and lessens fatigue. Using a pallet truck saves time when loading and unloading.

Reduced Risk and Injury

Safer and easier heavy lifting can be performed by using HPT, therefore reducing the injuries inflicted on your workers. Using HPT will reduce the costs related to employee injury.

Ease of Use and Versatility

HPT are smaller than forklifts which means that they can manoeuvre around tight spaces and corners a lot easier. They come in a variety of designs, including different lengths and sizes, making them ideal for most industries.

No certification required

HPT do not require any 3rd party certification for load.



**Health and
Safety Training
for Employees**


Call: +91 98978 15559



Call: +91 98978 15559
Email: rahul@uksangroup.com
www.uksangroup.com

Hand Pallet Truck - Specifications. Also available in Capacity: 2000/2500/3000/5000 kg.

Model		VH-HPT2.5	
Capacity	kg	2500	2500
Lowered for height	h13 = mm	80	80
Steering wheel Size	mm	180*50	180*50
Fork wheel double size	mm	80*70	80*70
Max Lift Height	h3 = mm	200	200
Height of tiller in drive position	h14 = mm	1224	1224
Overall length	L1 = mm	1550	1550
Fork length	L = mm	1150	1150
Distance over fork arms	b5 = mm	550	550
Ground clearance, Centre of wheelbase	m2 = mm	40	30
Aisle width for pallets 1000 x 1200 crossways	Ast - mm	1733	1803
Aisle width for pallets 800 x 1200 lengthways	Ast - mm	1783	1803
Turning Radius	Wa = mm	1266	1336
Fork width	e = mm	164	164
Wheel type		Nylon / PU	Nylon / PU
Chassis thickness	mm	3.75	3.75
Weight	kg	72/75	74/77

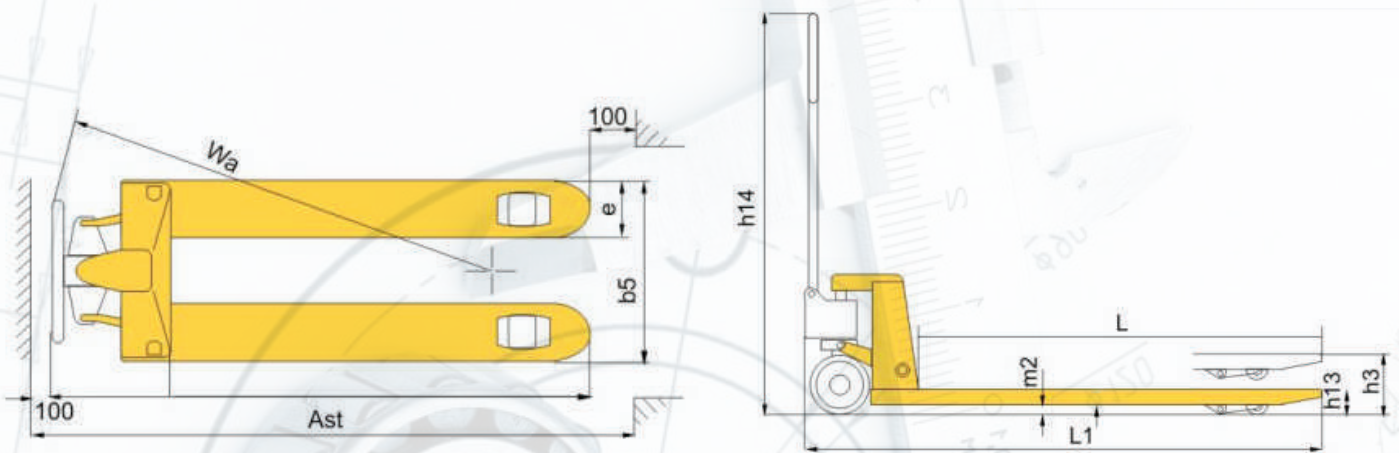

FREE EMS
(Equipment Management Software)



UKSAN



Refurbish your equipment

Call: +91 98978 15559
Email: rahul@uksangroup.com
www.uksangroup.com